

# THE INEXPENSIVE SOLUTION FOR STANDARD DOORS – WITH QUALITY ASSURED

With the TS 71, DORMA has developed a door closer that rounds off its ClassicLine series perfectly. The ease and speed with which it can be fixed, the fact that its spring strength can be so easily adapted to the door size – by simply turning round the hinge plate – and its competitive price should make it the ideal choice for your application.

Quality assured manufacture to DIN ISO 9001, EN 29001, BS 5750. Certified and verified by BSI Quality Assurance Reg.-No. Q 6423, FM 10756



### F Approval certification

The DORMA TS 71 is CERTIFIRE approved (Certificate No. CF 268) for door types ITT 120 and MM/IMM 240



### Benefits

#### For the trade

- Increased stocking flexibility thanks to use of the standard ClassicLine series arm.
- Complements the ClassicLine series as a competitive model for standard doors.

#### For the installer/fabricator

- Non-handed design.
- Easy and quick to fix.

#### For the architect/specifier

- Competitive and reliable.
- Compact construction combined with classic design.

#### For the user

- Constant closing action virtually unaffected by temperature fluctuations.
- Optimum closing speed adjustment with two regulating valves.
- Reliable closing with adjustable latching action.

### Data and features


Data and features		TS 71
Spring strength (adjustable by turning round the hinge plate)	Size	EN 3/4
Standard doors ≤ 1100 mm <sup>1)</sup>		●
External doors, outward opening		–
Fire doors		●
Non-handed		●
Arm type	Standard Slide channel	● –
Closing speed adjustable at 2 separate valves	180° – 15° 115° – 10°	●
Latching action adjustable (by arm)		●
Backcheck		–
Delayed action		–
Hold-open		○
Weight in kg		1.2
Dimensions in mm	Length Overall depth Height	232 245 68
Door closer tested and approved to EN 1154		●
CE Marked		●

● = Yes – = No ○ = Option

<sup>1)</sup> With parallel-arm fixing, the closing force is approx. 20 Nm (for doors up to 950 mm)

### Standard and optional functions

- 1 Closing speed adjustable in the range 180° – 15°.
- 2 Closing speed adjustable in the range 15° – 0°.
- 3 Latching action.
- 4 Hold-open range for model with hold-open arm (optional extra).

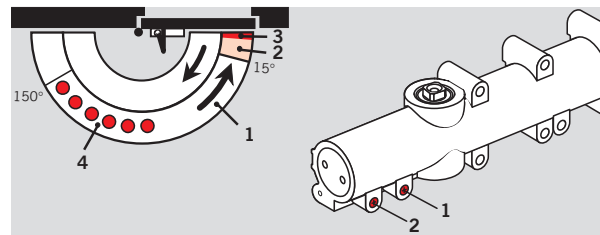

### Closing force settings

Door width	Setting
≤ 950	EN 3
≤ 1100	EN 4

With the TS 71, the spring strength (size setting) of the closer is adjusted to the door width concerned by merely turning round the hinge plate.

