

fullex[®] XL LOCKS

PVCu Doors

SINGLE AND DOUBLE DOORS

XL is available in a range of lock configurations and can be used with either one piece or individual keep sets.

The XL's attractive silver finish is also corrosion resistant to neutral salt spray in excess of BS EN 1670 Grade 4, giving peace of mind to hard pressed fabricators and consumers.

One piece or individual keeps

3 opposing steel hooks and two steel anti-lift bolts

Two or four roller cams

Easily reversible latch as standard

Dual, single or split spindle options

Extendable top and bottom as standard

Latch hold back snib on lock faceplate

Comes with a 10 year guarantee

For use on PVCu doors



Technical Data

Corrosion Resistance

BS EN 1670 Grade 4 for 240 hours

Cycle Operation

Cycle tested to 200,000 operations

Materials

Top and Bottom Hook

Chrome plated A3 hardened cast steel

Anti Lift Bolts

Chrome plated A3 hardened cast steel

Centre Hook

Dacromet coated A3 sintered steel

Faceplate and Gearbox

Mild steel, zinc and clear passivated

Roller Cams

Mild steel, zinc and clear passivated

For maximum security this lock can be used with the Kinetica K4 3 star BSI Kitemarked TS007 cylinder.



Secured by Design



Police Preferred Specification



The XL was designed from the outset to offer maximum security and reliability. XL features three hooks, two steel anti-lift bolts and the option of either two or four roller cams for compression and smooth operation. Every XL lock is extendable top and bottom for

maximum flexibility and when combined with Fullex high security shoot bolts, the XL door system is fully capable of meeting PAS 24 requirements. The XL 3 hook also forms the heart of the CE marked XL Exodus Panic exit system and utilises the same lock preparation.

Faceplate = 2200mm x 16mm (Silver Passivated)

518mm Centres (needs 9 packers)

Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Anti-Lift Bolts	No of Rollers	No of Mushrooms	Product Code
Dual	35mm	243mm	92mm or 92/62mm	3 (opposing)	2	2	0	XL32R518
Single	35mm	243mm or 219mm	92mm	3 (opposing)	2	2	0	XL32R518SP
Split	35mm	243mm or 219mm	92mm	3 (opposing)	2	2	0	XL32R518S/S

635/572mm Centres (needs 11 packers)

Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Anti-Lift Bolts	No of Rollers	No of Mushrooms	Product Code
Dual	35mm	243mm	92mm or 92/62mm	3 (opposing)	2	4	0	XL34R6357
Single	35mm	243mm or 219mm	92mm	3 (opposing)	2	4	0	XL34R6357SP
Split	35mm	243mm or 219mm	92mm	3 (opposing)	2	4	0	XL34R6357S/S

650mm Centres (needs 9 packers)

Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Anti-Lift Bolts	No of Rollers	No of Mushrooms	Product Code
Dual	35mm	243mm	92mm or 92/62mm	3 (opposing)	2	2	0	XL32R650
Single	35mm	243mm or 219mm	92mm	3 (opposing)	2	2	0	XL32R650SP
Split	35mm	243mm or 219mm	92mm	3 (opposing)	2	2	0	XL32R650S/S

735/758mm Centres (needs 11 packers)

Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Anti-Lift Bolts	No of Rollers	No of Mushrooms	Product Code
Dual	35mm	243mm	92mm or 92/62mm	3 (opposing)	2	4	0	XL34R7474
Single	35mm	243mm or 219mm	92mm	3 (opposing)	2	4	0	XL34R7474SP
Split	35mm	243mm or 219mm	92mm	3 (opposing)	2	4	0	XL34R7474S/S

XL2R2M and XL4R Locks


Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Dead Bolts	No of Rollers	No of Mushrooms	Product Code
Dual	35mm	243mm	92mm or 92/62mm	0	0	2	2	XL2R2M
Dual	35mm	243mm	92mm	0	0	4	0	XL4RPRO

XL Slave Lock


Spindle	Backset Size	Handle Backplate	Handle Centres	No of Hooks	Anti-Lift Bolts	No of Rollers	No of Mushrooms	Product Code
Single	35mm	243mm or 219mm	92mm	0	0	0	0	XLSL

ACCESSORIES


Description	Product Code
120mm lock extension	XLEXT120
400mm roller extension	XLEXT400
PAS24 security plates (pack of 3)	XLSP
2 x Mild steel shoot bolts	XLSEB
2 x Mild steel shoot bolts (low threshold)	XLSEBLOW

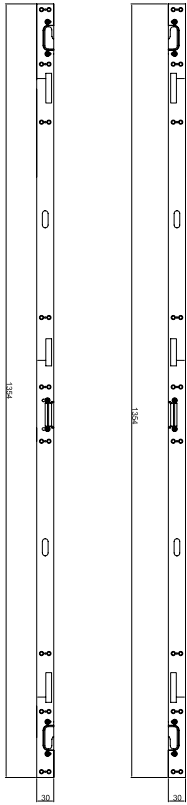


XLK2L518 XLK2R518




518mm Centres

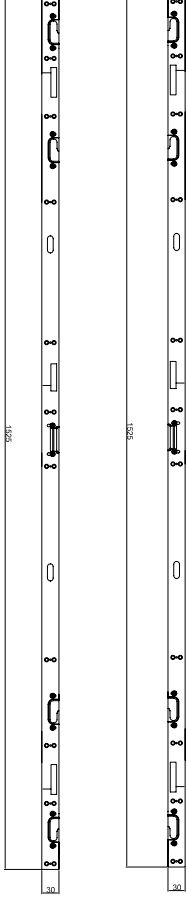


XLK4LTH XLK4RTH



635/572mm Centres

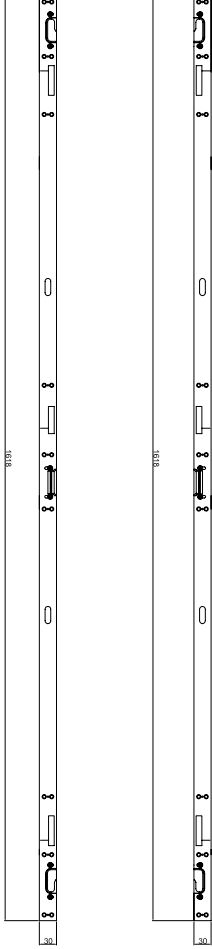


XLK2L650 XLK2R650





650mm Centres

XL KEEPS

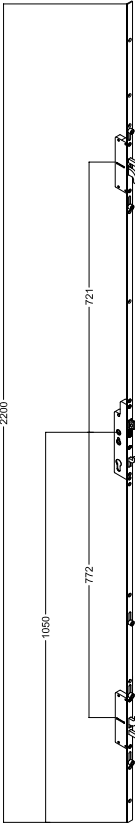


735/758mm
Centres

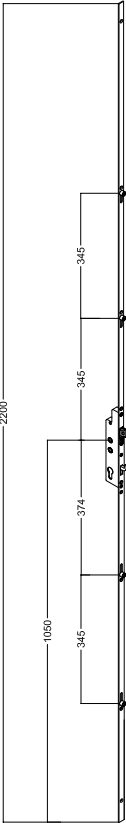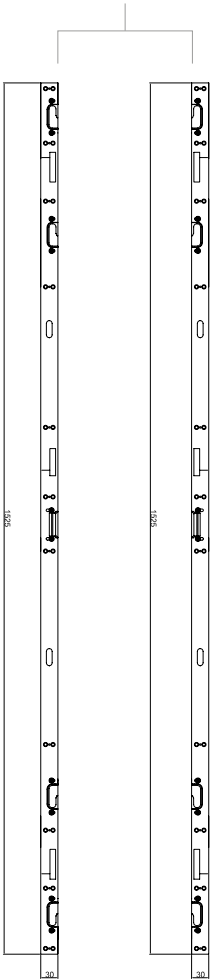


XL2R2M
and XL4R



XLKCL XLKCR



XLKS2R



L - Left side keep
R - Right side keep

XLK4L7474 XLK4R7474