

GIO REEDED DOOR HANDLE ON 200MM PLATE

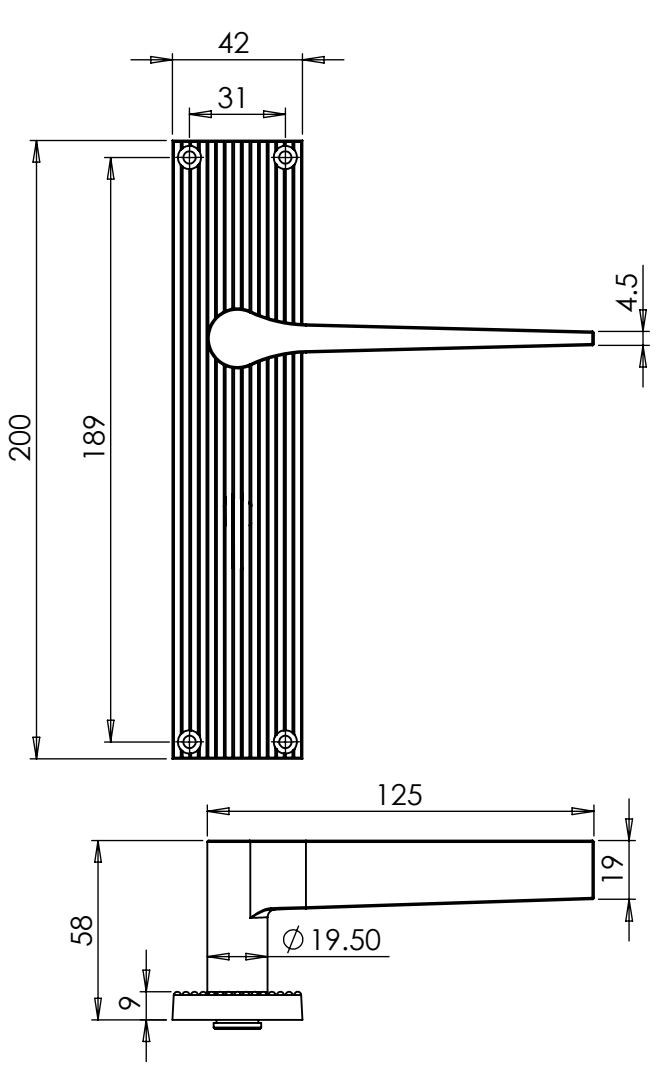

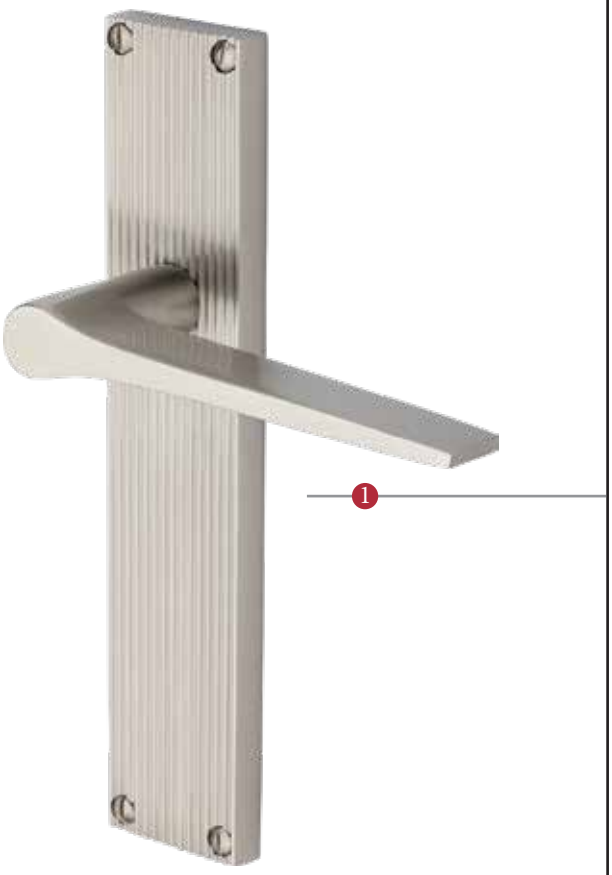

This latch handle is suitable for use with most U.K. tubular latches.
For a new door installation we would recommend using our York standard tubular latch from the list below.

3

Iron starter screw x 1pc.
Drill pilot holes, use the starter screw to cut a thread

2



Spindle : 7.8mm x 85mm - 1pc.

8x Brass wood screws
Fasten the brass screw into the pilot hole

Box Contains	① Lever handle illustrated	② 1x 85mm spindle suitable for 35mm & 45mm thick door	③ 1x Iron screw 8x Brass wood screws

FINISHES	
MB	Matt Bronze
SB	Satin Brass
SN	Satin Nickel
AT	Antique Brass
PB	Polished Brass
PC	Polished Chrome

TUBULAR LATCH (not Included, must be ordered seperately)	
YKTL2N-AT	2 1/2″ Antique Finish
YKTL2N-BLK	2 1/2″ Black Finish
YKTL2N-MB	2 1/2″ Matt Bronze Finish
YKTL2N-PB	2 1/2″ Brass Finish
YKTL2N-PC&PN	2 1/2″ Polished Chrome & Nickel Finish
YKTL2N-SB	2 1/2″ Satin Brass Finish
YKTL2N-SN&SC	2 1/2″ Satin Nickel & Chrome Finish
YKTL3N-AT	3″ Antique Finish
YKTL3N-BLK	3″ Black Finish
YKTL3N-MB	3″ Matt Bronze Finish
YKTL3N-PB	3″ Brass Finish
YKTL3N-PC&PN	3″ Polished Chrome & Nickel Finish
YKTL3N-SB	3″ Satin Brass Finish
YKTL3N-SN&SC	3″ Satin Nickel & Chrome Finish

M Marcus Ltd., Dudley

Product Code	Material
RR4710	Solid Brass

Sizes shown are in mm and approximate.
We reserve the right to amend where necessary and without any prior notice.

Property of M Marcus Ltd. ©