


ALESSA LEVER ON ROSE

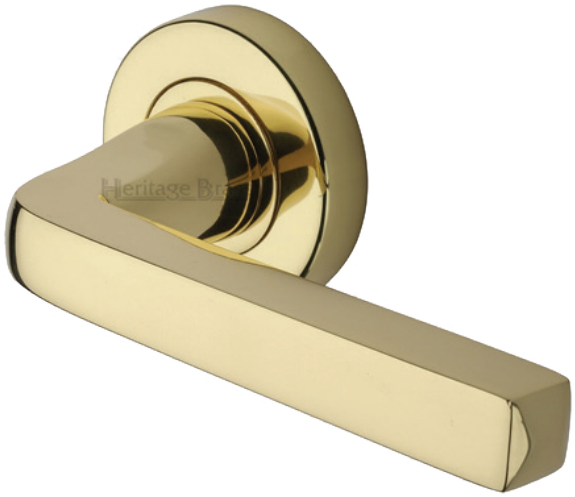


1

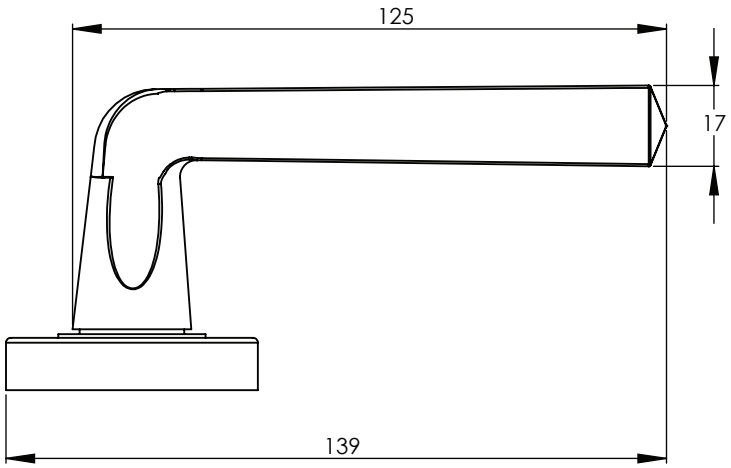

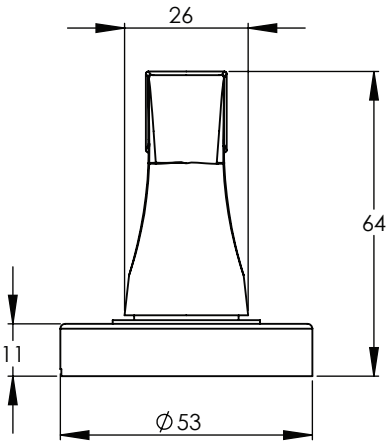

This latch handle is suitable for use with most U.K. tubular latches.
For a new door installation we would recommend using our York standard tubular latch from the list below.

2



Spindle : 7.8mm x 85mm

4

2x Machine screws for 35mm door
2x Machine screws for 44mm door

For a secure bolt through fixing



Wood screws
To eliminate rose rotation

3



2.5 mm Allen key
To tighten handle grub screws

Box Contains	① Lever handle illustrated	② 1x spindle suitable for 35mm & 44 mm thick door	③ 1x Allen key	④ 4x Machine screws 8x Wood screws

FINISHES

MB	Matt Bronze
SB	Satin Brass
PN	Polished Nickel
SN	Satin Nickel
AT	Antique Brass
SC	Satin Chrome
PB	Polished Brass
PC	Polished Chrome

TUBULAR LATCH

(not Included, must be ordered separately)

YKTL2N-AT	2½″ Antique Finish
YKTL2N-BLK	2½″ Black Finish
YKTL2N-MB	2½″ Matt Bronze Finish
YKTL2N-PB	2½″ Brass Finish
YKTL2N-PC&PN	2½″ Polished Chrome & Nickel Finish
YKTL2N-SB	2½″ Satin Brass Finish
YKTL2N-SN&SC	2½″ Satin Nickel & Chrome Finish
YKTL3N-AT	3″ Antique Finish
YKTL3N-BLK	3″ Black Finish
YKTL3N-MB	3″ Matt Bronze Finish
YKTL3N-PB	3″ Brass Finish
YKTL3N-PC&PN	3″ Polished Chrome & Nickel Finish
YKTL3N-SB	3″ Satin Brass Finish
YKTL3N-SN&SC	3″ Satin Nickel & Chrome Finish

M Marcus Ltd., Dudley

Product Code	Material
V8300	Solid Brass

Sizes shown are in mm and approximate.
We reserve the right to amend where necessary and without any prior notice.

Property of M Marcus Ltd. ©