

3 LEVER SASHLOCK 2 ½" and 3"



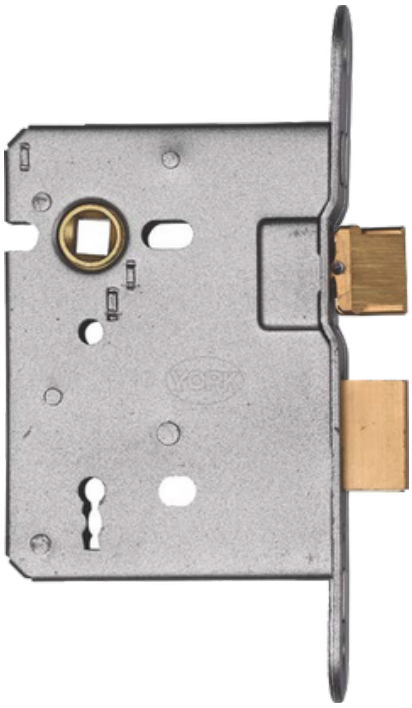

1 SASHLOCK AND STRIKE DIMENSIONS

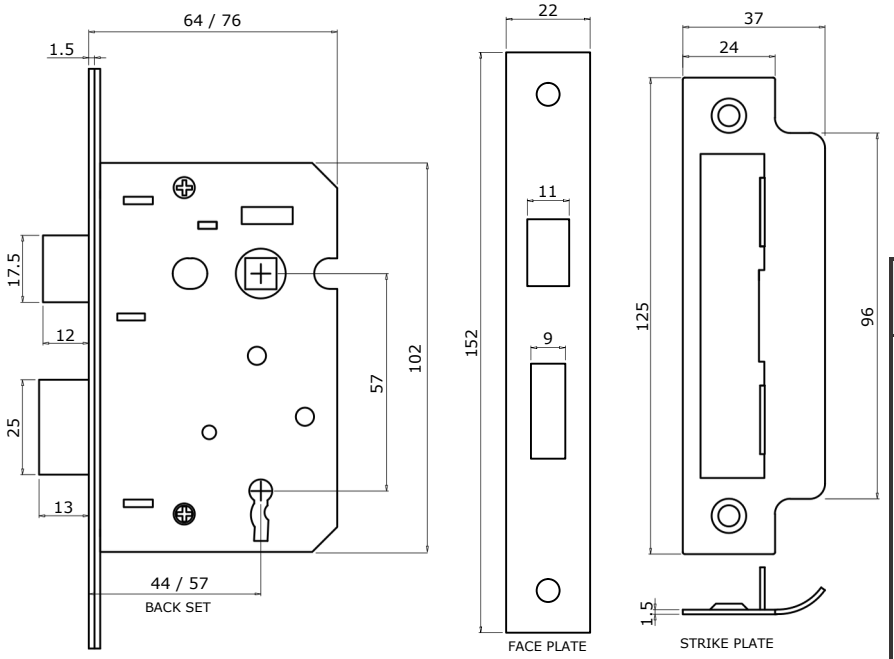

3 LEVER SASHLOCK

For internal doors which need to be latched and locked.
Suitable for use with lever lock handles with 8mm spindles and 57mm centres (CTC)
Also suitable for use with lever on rose handles requiring through the lock bolt fixing.
When installing lever on rose handles use with separate keyhole escutcheons.
Includes dust box for strike plate.
Latch is easily reversed for door handing by simply rotating the latch bolt.

SIZES CODES & FINISHES

YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) PB
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) PC&PN
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) SN&SC
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) AT
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) BLK
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) MB
YKSL32N / YKSL33N 2 ½" (64mm) 3" (76mm) SB

2  4 x screws

Box Contains	①	②	③
	Sashlock YKSL32N YKSL33N	4 x screws	Fixing guide template

M Marcus Ltd., Dudley

Material	Description	Sizes shown are in mm and approximate unless otherwise indicated. We reserve the right to amend where necessary and without any prior notice.
Steel, Zinc Alloy & Plastics	Sashlock	

Property of M Marcus Ltd. ©