

OWEN KNURLED MORTICE KNOB SPRUNG ON ONE SIDE ~ CONCEALED FIXING



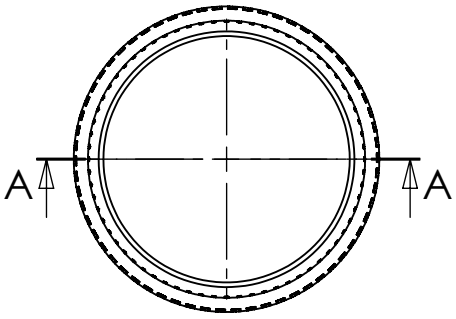

1

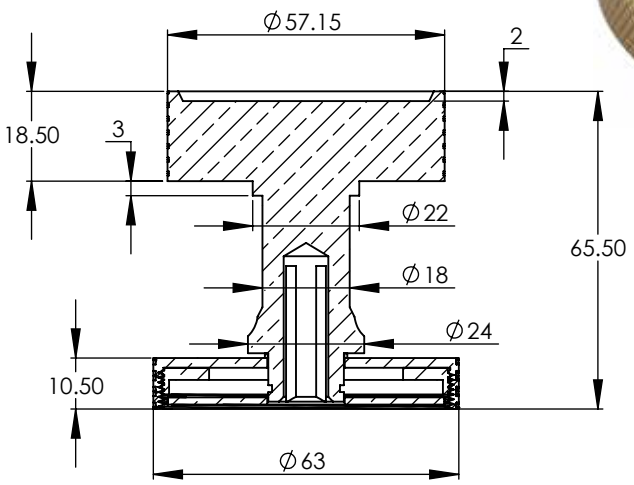


SECTION A-A


This mortice knob is suitable for use with most U.K. tubular latches.
For a new interior door installation we would recommend using our York standard tubular latch from the list below.

3

2



Spindle : 7.8mm x 85mm - 1pc.



Spindle : 7.8mm x 90mm - 1pc.



8x Steel wood Screws
Fasten the Steel Screws into the Pilot holes

[Includes a Fitting Guide]

TUBULAR LATCH
(not Included, must be ordered seperately)

YKTL3N-AT	3″ Antique Finish
YKTL3N-MB	3″ Matt Bronze Finish
YKTL3N-PB	3″ Brass Finish
YKTL3N-PC&PN	3″ Polished Chrome & Nickel Finish
YKTL3N-SB	3″ Satin Brass Finish
YKTL3N-SN&SC	3″ Satin Nickel & Chrome Finish

FINISHES

ME Matt Bronze finish
AT Antique Brass finish
SB Satin Brass finish
PE Polished Brass finish
SN Satin Nickel finish
PC Polished Chrome finish

Box Contains	① Pair of mortice knobs	② 2x spindle suitable for 35mm & 44mm thick door	④ 8x Steel wood screw

M Marcus Ltd., Dudley

Product Code	Material		Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
OWN5490	Solid Brass		

Property of M Marcus Ltd. ©