

KENSINGTON MORTICE KNOB UNSPRUNG

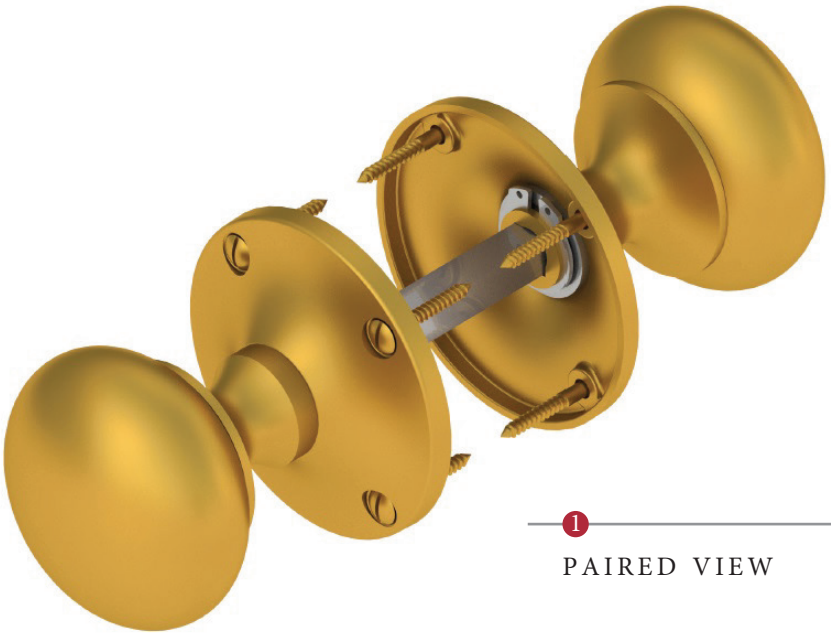


1 PAIRED VIEW

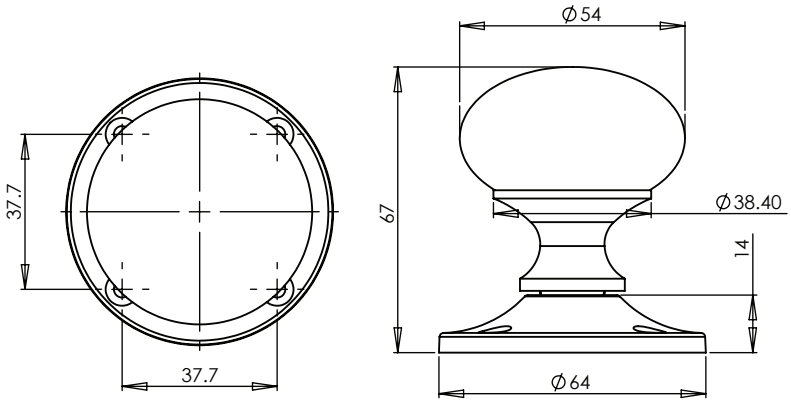

This unsprung mortice knob is suitable for use with most U.K. heavy duty tubular latches.
For a new interior door installation we would recommend using our York heavy duty tubular latch from the list below.

2



Spindle : 7.8mm x 100mm- 1pc.

3



2.5 mm Allen key
Used to tighten Grub screw.

4



Iron starter screw x 1pc.
Drill pilot holes, use the starter screw to cut a thread

5



8x Brass wood Screws
Fasten the Brass Screws into the Pilot holes

HEAVY DUTY TUBULAR LATCHES
(not Included, must be ordered seperately)

YKAL3N-AT	3" Bolt Through Antique Finish
YKAL3N-BLK	3" Bolt Through Black Finish
YKAL3N-MB	3" Bolt Through Matt Bronze Finish
YKAL3N-PB	3" Bolt Through Polished Brass Finish
YKAL3N-PC&PN	3" Bolt Thro' Pol.Chrome/Nickel Finish
YKAL3N-SB	3" Bolt Through Satin Brass Finish
YKAL3N-SN&SC	3" Bolt Thro' Sat.Chrome/Nickel Finish

FINISHES

- ME Matt Bronze finish
- SC Satin Chrome finish
- SB Satin Brass finish
- PB Polished Brass finish
- SN Satin Nickel finish
- PC Polished Chrome finish
- AT Antique Brass finish

Box Contains	① Pair of mortice knobs	② 1x spindle suitable for 35mm & 44mm thick door	③ 1x Allen Key	④ 1x Iron screw	⑤ 8x Brass wood screw

M Marcus Ltd., Dudley

Product Code	Material		Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
KEN980	Solid Brass		

Property of M Marcus Ltd. ©