

MILTON DOOR HANDLE ON PLATE



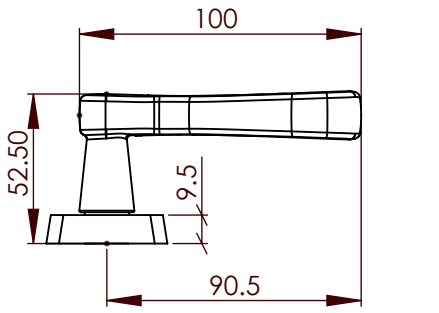

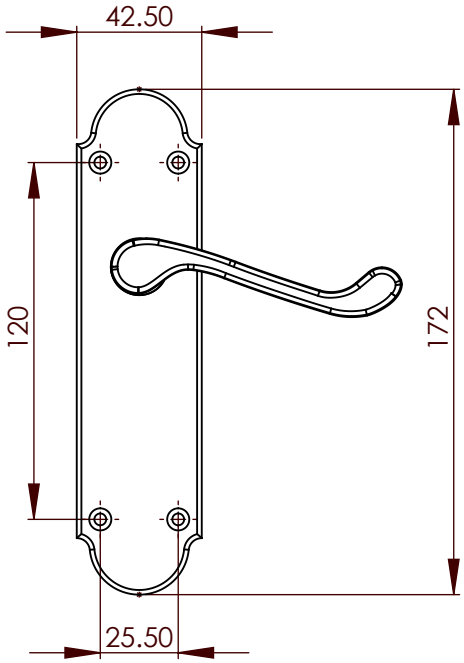

This latch handle is suitable for use with most U.K. tubular latches.
For a new door installation we would recommend using our York standard tubular latch from the list below.

2



Spindle : 7.8mm x 85mm - 1pc.

3



8x Brass wood screw
Fasten the brass screw into the pilot hole

FINISHES	TUBULAR LATCH (not Included, must be ordered seperately)	
SN Satin Nickel	YKTL2N-PB	2½″ Brass Finish
	YKTL2N-PC&PN	2½″ Polished Chrome & Nickel Finish
SC Satin Chrome	YKTL2N-SN&SC	2½″ Satin Nickel & Chrome Finish
PB Polished Brass	YKTL3N-PB	3″ Brass Finish
	YKTL3N-PC&PN	3″ Polished Chrome & Nickel Finish
PC Polished Chrome	YKTL3N-SN&SC	3″ Satin Nickel & Chrome Finish

Box Contains	①	②	③
	Lever handle illustrated	1x spindle suitable for 35mm & 44 mm thick door	8 x Wood screws

M Marcus Ltd., Dudley

Product Code	Material
PR510	Solid Brass

Sizes shown are in mm and approximate.
We reserve the right to amend where necessary and without any prior notice.

Property of M Marcus Ltd. ©