Rim Locks - Lever

1439

Lever Rim Lock



| Application: | • For timber doors up to 50mm thick, | |
|----------------|---|------------|
| кррпсатоп. | opening inwards only | |
| | Hand must be stated on order Also suitable for steel and composite doors | |
| | Also suitable for steel and composite doors special fixings required | |
| | | |
| Specification: | The deadbolt is locked or unlocked by key | |
| specification. | from either side | · · · · |
| | The latch bolt is withdrawn by knob from | |
| | either side | |
| | Backset: 53mm | |
| | Case & Keep: Steel, black enamel finish | |
| | Deadbolt: Brass | |
| | Latch Bolt: Brass, reversible | |
| | Locking Mechanism: 3 lever | o |
| | Keying: Not available master keyed. May | Standards: |
| | be keyed alike with 1139 lock. Supplied | |
| | with 2 steel nickel plated keysKey Blank Number: KB144 | 5 YEAR |
| | 5 | |
| | Spare Cut Keys: RC series (numbers range R1C-R50C) | |
| | | |

• Available in BJ finish


• BJ - Black Japanned finish

Finish:

Variants:

| [| J1439-BJ-LH | Lever Rim Deadlock - Left Hand |
|---|-------------|---------------------------------|
| | J1439-BJ-RH | Lever Rim Deadlock - Right Hand |

1

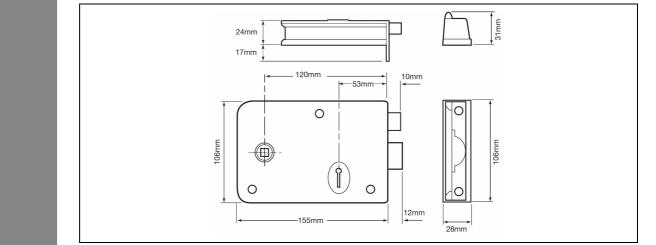

Technical Design: