

C1865 REEDED RECTANGULAR FLUSH PULL


C1865 105

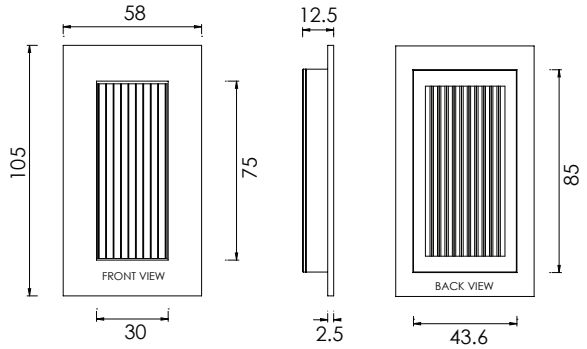


C1865 175

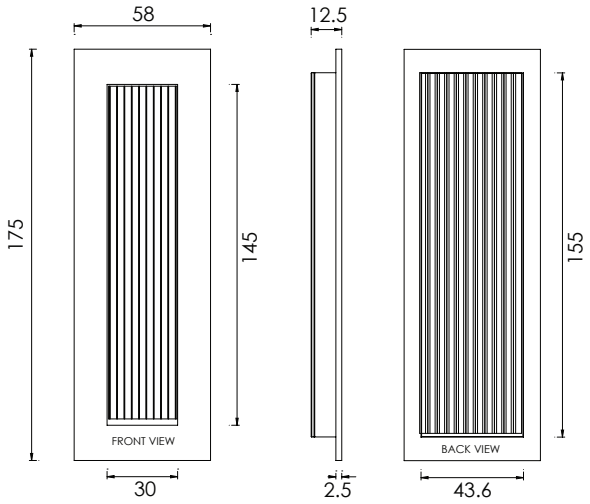

C1865 300

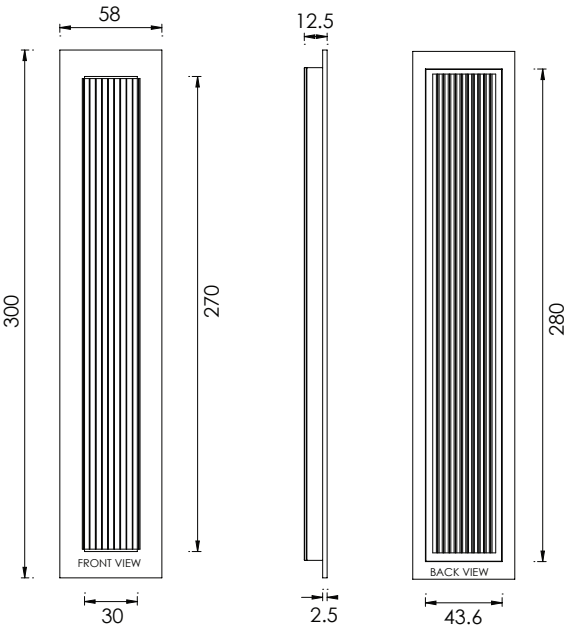





(1)

(2) For dimensions of the three product sizes:
- **C1865** 105
- **C1865** 175
- **C1865** 300

see the outlines given

The recess measurement required to fit this item is taken from the back

(3) 2 x Brass Pins *(See top right)*

Overview

(1) Flush Pull illustrated

(2) (General dimensions of Flush Pull)

(3) Supplied with:
2 x 27mm Brass Pins (pin on the inside of recessed handle)

FITTING

1. Position flush pull centrally to determine where to remove required recess for flush pull. This measurement is taken from the back view.
2. Remove just sufficient timber to create a recess for the back of the flush pull and which allows the plate to lie flat onto the surface of the door.
3. The door may dictate where the pull can be fitted, as general guide for fitting, the centre of the pull should be positioned approx. 1000mm from the floor, and this should be a suitable height for most people.

Note: The Pin fixing may also be supplemented by gluing, the suggested glue is polyurethane, particularly if the doors are in bathrooms or areas of high humidity as this type of glue is moisture resistant and bonds to Metal/Wood and most other building materials.

M Marcus Ltd., Dudley

Product Code	Material		
C1865	Solid Brass	Available in all Heritage Brass finishes.	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.

Property of M Marcus Ltd. ©