

## CONCEALED SLIDE ARM DOOR CLOSERS

## ITS.11204.3.5

Renowned for its slimline mechanism (32mm body) and suitability for assisting BS8300 requirements, the key difference between the ITS.11204 and the ITS.11204.3.5 is the slimline micro rail that comes as standard on the ITS.11204.3.5, allowing the concealed closer to be used in door frames of thinner and more shallow widths.

**Key Features:**

- Slim micro rail of 20 x 30mm
- Power Adjustable by spring, size 2-4
- Available in Silver & Satin Nickel for next day delivery
- Designed for hollow profile frames, but can be used in solid timber frames



Opening Angle  
110°



Two-Stage  
Speed Regulation



Guarantee



Max Door  
Width  
1100mm



Max Door  
Weight  
130Kg



Intumescent  
kit (IP.114M)

**Finishes**

SE  
Silver



SNP  
Satin Nickel

See page 148 for more detail

**Product Features****ITS.11204.3.5**


Delayed Action	-
Back Check	-
Opening Angle	110°
Door Width	595-1100mm
BS8300 Min Door Width	835mm
Max Door Weight	<130kg
Power Adjustment	By Spring
Hold Open (not for fire doors)	o
Dimensions	W243 x H52 x D32mm

**Certification Compliance**

Certifire	CF5902
CE marked	EN1154
BS EN1634-1	✓
EPD 3.09E+01 kg CO <sub>2</sub> eq	✓

**Key:** ✓ Yes   - No   o Option

We recommend concealer closers are machined on a CNC machine.

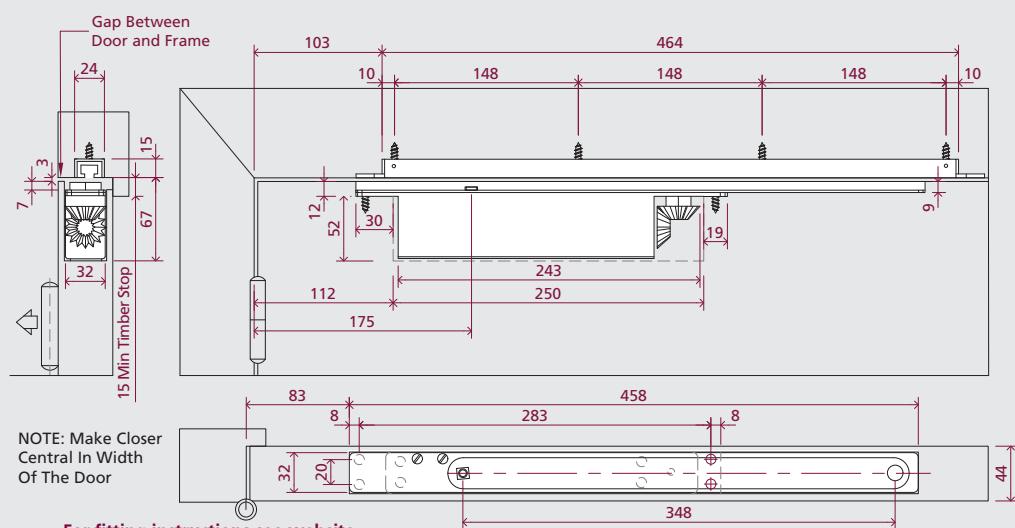

All dimensions shown are in mm • For fitting instructions see website

# ITS.11204.3.5 Components

Product Code	Re-order Code	Finish	EN Size	Product Description
ITS.11204.3.5	11420	Silver	2-4	ITS.11204 -concealed micro rail slide arm door closer
	11421	Satin Nickel		
ITS.11004	11165	Silver	2-4	SINGLE ACTION – ITS.11204 concealed door closer mechanism only.
SA.3.5.SE	11300	Silver	-	Micro slide rail complete with connector bar
SA.3.5.SNP	11301	Satin Nickel	-	
SA.3.MF	12030	-	-	Micro Rail Mounting Frame
SA.CS.M	12140	White	-	Micro Rail Cushion Stop
SA.HO.M	12138	Silver	-	Micro Rail Hold Open Device
IP.114M	11955	-	-	Intumescent Pack