



CE TUBULAR LATCH 2½"

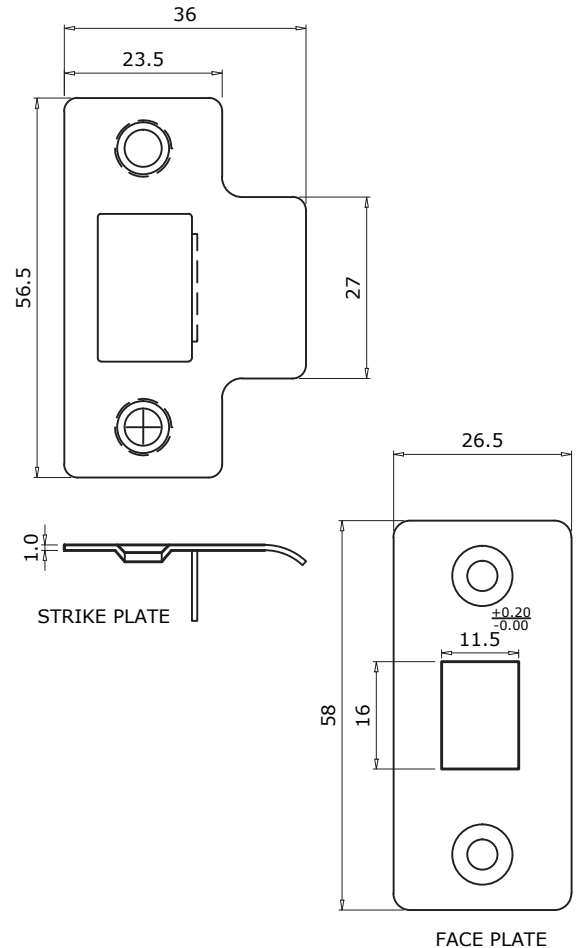

1 LATCH AND STRIKE DIMENSIONS

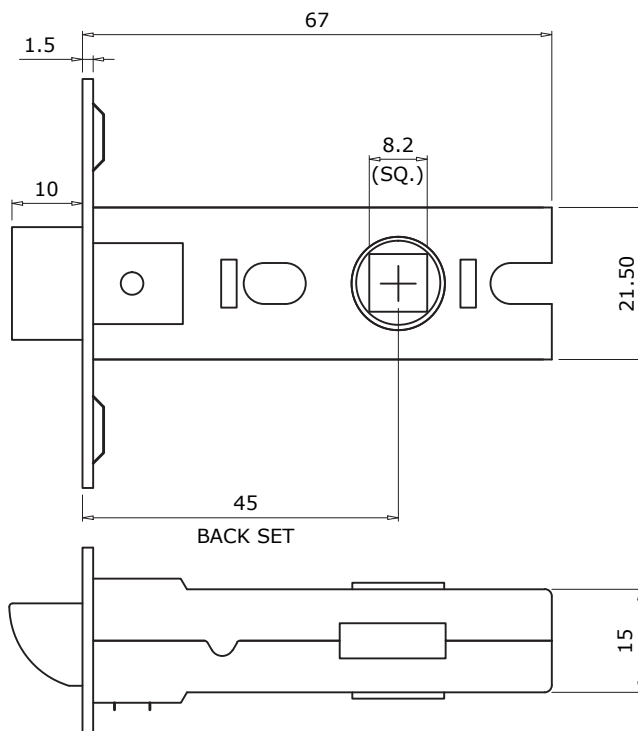

SIZES CODES & FINISHES

LAL0081-AT	2½" Antique Finish
LAL0081-BLK	2½" Black Finish
LAL0081-MB	2½" Matt Bronze Finish
LAL0081-PB	2½" Brass Finish
LAL0081-PC&PN	2½" Pol.Chrome/Nickel Finish
LAL0081-SB	2½" Satin Brass Finish
LAL0081-SN&SC	2½" Satin Chrome/Nickel Finish

CE TUBULAR LATCHES

- CE Tubular Lightly Sprung Latch
- CE Marked / UKCA Marked.
- Fire tested to BS EN 1634-1 suitable for use on 30 minute and 60 minute FD30 and FD60 fire doors.
- Tested to BS EN 12209-2003 the standard for mechanical locks and latches.
- Follower is suitable for 8mm square spindle
- Suitable for bolt through fixing 32-38mm
- To be used with Sprung furniture
- Suitable for use on standard & fire doors
2½" recommended for Levers
3" recommended for sprung Mortice Knobs
(Not recommended for unsprung Mortice Knobs)

2



4x screws

1

2

Box
Contains

Tubular Latch and
Strike plate

4x screws

M Marcus Ltd., Dudley

Material	Product Code	Description	Sizes shown are in mm and approximate. We reserve the right to amend where necessary and without any prior notice.
Metals	LAL0081	Standard Duty Tubular Latch	