CONCEALED VERTICAL DROP BOLT

Specification Sheet

CD

FEATURES

- Tamper proof design: The drop bolt is fully enclosed within the gate frame for added security.
- Simple assembly: Uses M10 studding that can be cut to length, making it suitable for a range of gate sizes.
- Versatile fit: Compatible with any box section larger than 30mm x 30mm.
- Clever security for double gates: On the double-gate version, the drop bolt can be lowered, rotated and locked in position. Closing the second gate ensures it cannot be unlocked.
- Travel length of 80mm



PRODUCT DETAILS


Product code	Description
CDD	For double gates
CDS	For single gates

INCLUDED IN THE BOX

- Lower bolt
- Top bolt
- Top housing
- Lower housing
- Handle
- 2x grub screws

HOW TO OPERATE

With the dropbolt for double gates, simply close the first gate and drop the bolt into the locked position, the second gate can then be shut and locked meaning the dropbolt cannot be lifted. For single gates the dropbolt will be used as a standard dropbolt with the neat concealed finish

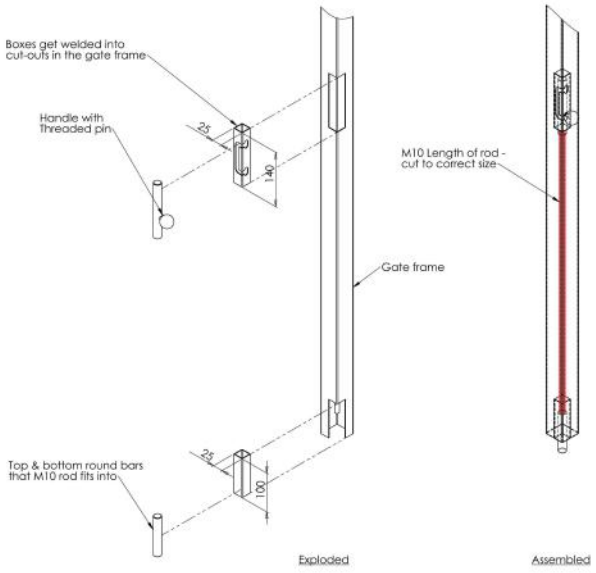

INSTALLATION

1. To install, cut the corner of your gate frame to fit in the two parts of the square box section provided.
2. The slotted section should be fitted where you want the drop bolt to be operated from. The other section should be fitted at the bottom of the gate.
3. Use a length of M10 studding (not included) to joint the two round sections to make the bolt as long as you need it.

© Copyright Gatemaster 2026